

[E[M]CONOMY
means:]

emco industrial
training

Designed for your profit



**Small Volume. Great Performance.
CONCEPT MILL 105**

CNC training with industrial performance

Concept MILL 105

Slides and load-bearing elements are manufactured from gray cast iron for the Concept MILL 105 to ensure maximum precision. Equipped with infinitely variable main drive, 10-station tool changer, pneumatic vise and NC indexing device as optional fourth axis, this compact machine in table format is optimally suitable for teaching of sophisticated function and manufacturing technologies. The control for the Concept MILL 105 is connected via PC, on which the interchangeable WinNC control from EMCO can be installed.

[Tool magazine]

- Tool magazine with directional logic
- For 10 tools
- Engraving spindle attachment

[Work area]

- Generous view of work area
- Best ergonomics

[Machine covers]

- All-round protection against chips
- 100% coolant retention
- Optimum view of working area
- Large safety glass window in door

[Swivel table]

- Extensible drawer for PC keyboard
- Arranged ergonomically

[Main drive]

- Infinitely variable main drive
- Three-phase asynchronous motor


Machine with optional equipment

[Machine base]

- With extensible drawer
- Provides space for PC tower




Camshaft-housing



Milled part



Milled part

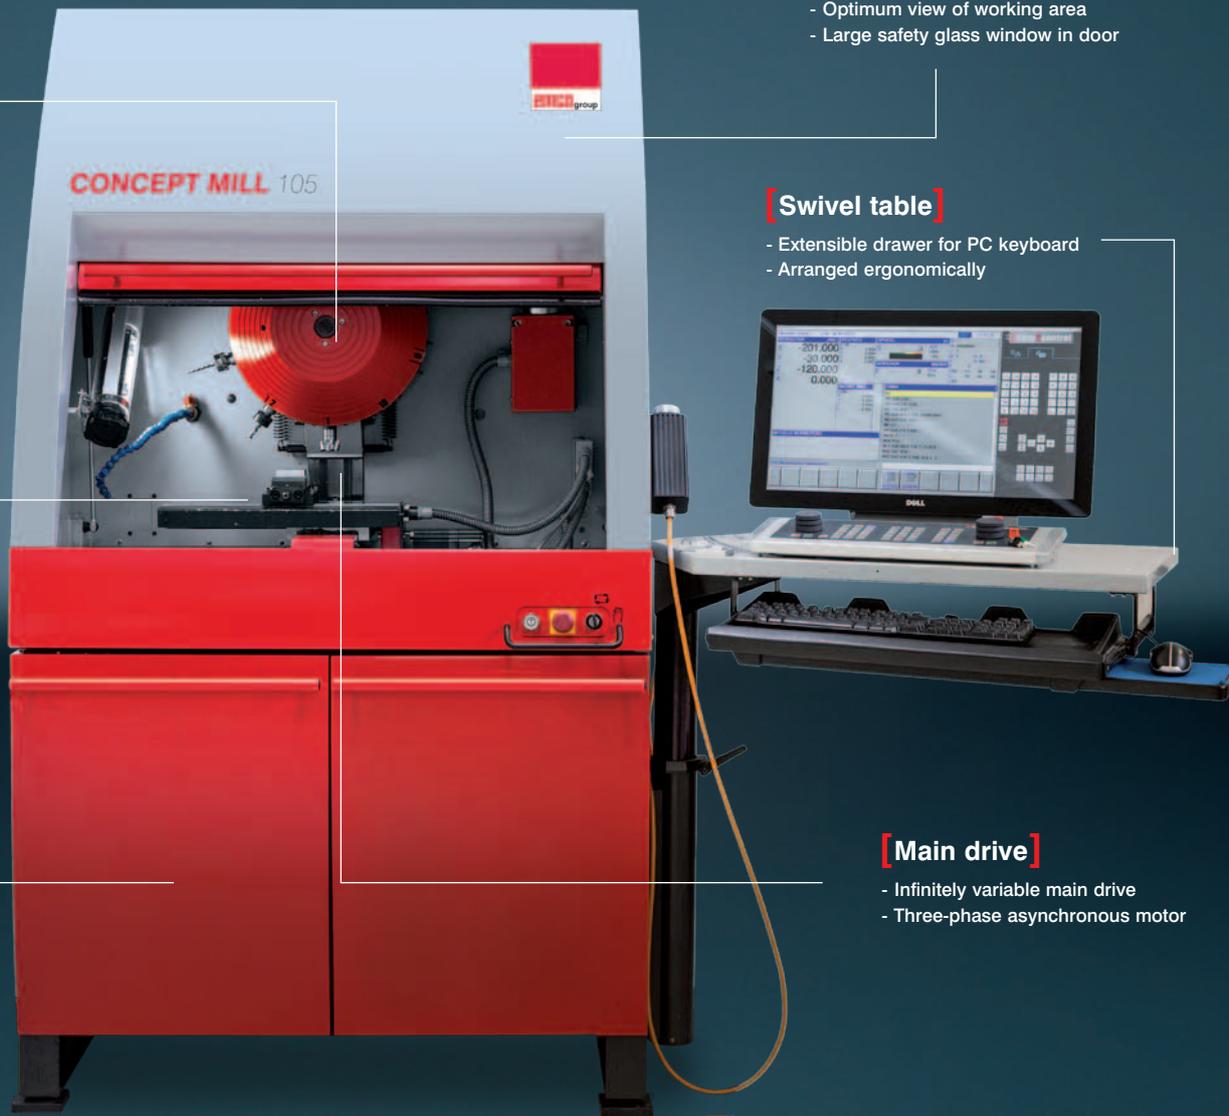

[Engineering]

Highlights

- Stable, gray cast-iron construction, suitable for industrial use
- 10 station tool changer with directional logic
- Backlash-free bearings for working spindle in precision, lifetime-lubricated, angular ball bearings
- Infinitely variable main and feed drives
- Realistic execution of all essential milling operations

Options

- TFT display and control keyboard
- NC indexing device (fully functioning fourth axis) with tailstock, three-jaw chuck and live center
- Engraving spindle attachment
- Automatic clamping device
- Electronic handwheel
- Coolant system
- Minimum quantity lubrication
- Machine base with swivel table
- Easy2operate

[The interchangeable control]

The unique concept of the interchangeable control can be fitted to all Concept machines. In doing so, the user is trained on all CNC industry controls that are common on the market.


The result: All CNC technicians can be applied more flexibly. And this is a decisive plus: for qualified employees as well as for the business.



The conversion to another control system is carried out within a minute by calling up the respective software and by simply replacing the controller specific module.



Simple to program using the EMCO WinNC control units

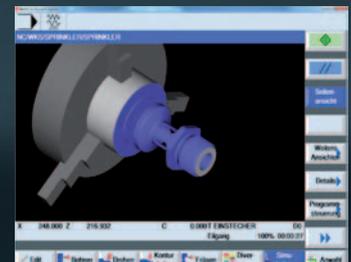


Simulation suitable for training using Win3D-View

[Easy2control: New operating concept]

Optional it is possible to equip the machine with the latest software of the interchangeable control, with which control specific and machine keyboards of the WinNC can be displayed on a 16:9 Full-HD screen – Easy2control. The different panels for machine, control and quick access can be switched via tabs.

The buttons and rotary knobs can either be operated by using the mouse or in case a Full HD touchscreen is used directly on the keys and switches on the monitor.

To operate the software on the Concept machine a license dongle and a small machine control panel - „Easy2operate“ – is required.

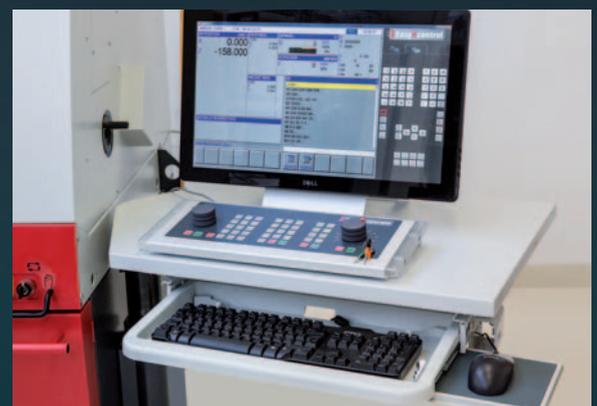

Easy2control with Easy2operate

[Technical data]

CONCEPT MILL 105

Work area	
Travel in X longitudinal	200 mm (7.9")
Travel in Y latitudinal	150 mm (5.91")
Travel in Z vertical	250 mm (9.84")
Min. distance spindle nose - table	95 mm (3.74")
Max. distance spindle nose - table	245 mm (9.65")
Table	
Clamping area (L x W)	420 x 125 mm (16.54x4.92")
T-slots: quantity, width, spacing	2 x 11 x 90 mm (2x0.43x3.54")
Max. table load	10 kg (22 lb)
Milling spindle	
Speed range	150 - 5000 rpm
Motor power 3 phase asynchronous motor	1.1 kW (1.48 hp)
Max. torque	4.2 Nm
Axis data	
Rapid motion speed X / Y / Z	5 m/min (196.85 ipm)
Max. feed rate X / Y / Z	0 - 5 m/min (0-196.85 ipm)
Feed power X / Y	2000 N
Feed power Z	2400 N
Accuracy	
Step resolution (X / Y / Z)	0.0015 - 0.001 mm
3 phase step motors	(0.00006 - 0.0004")
Average positioning variation in X / Y (VDI/DGQ 3441)	5 µm (0.0002")
Average positioning variation in Z (VDI/DGQ 3441)	5 µm (0.0002")

Tool change	
No. of tool stations	10
Tool selection	Directional logic
Max. tool diameter	55 mm (2.17")
Max. tool length	50 mm (1.97")
Max. tool weight	0.7 kg (1.54 lb)
Tool changing time T1 / T2 / T3	9/7.5/7.5 s
Power consumptions	
Power supply	1.4 kW (1.88 hp)
Dimensions	
Dimensions W x D x H	1135 x 1100 x 1100 mm (44.69x43.31x43.31)
Total weight	400 kg
Compressed air	6 bar


EMCO WinNC Controls

Sinumerik Operate 840D sl / 828D	FANUC Series 31i
Sinumerik 810D / 840D	FANUC Series 21
Sinumerik 810	FANUC Series 0
Sinumerik 820	Emcotronik TM02
EMCO EASY CYCLE	CAMConcept
FAGOR 0855 MC	Heidenhain TNC 426 / 430

User Interface for Easy2control

Sinumerik Operate 840D sl / 828D	FANUC Series 31i
Siemens 810D / 840D	FAGOR 8055 TC
HEIDENHAIN TNC 426 / 430	

Machine layout

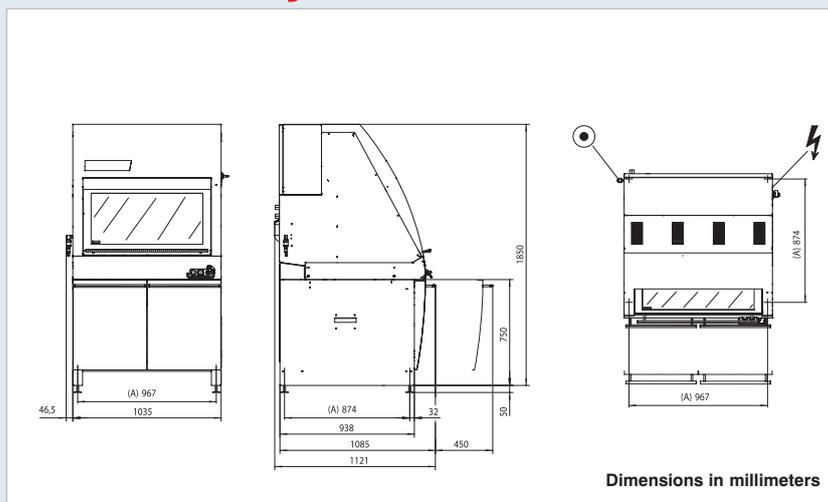

Power

